



Lay In Diffuser RPE Steel / Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Return modular false ceiling mounted 24" x 24" with perforated face and round duct connection.

1

Finishes

Baked electrostatic powder coating in Gloss White (standard). (Other colors available)

2

Dimensions

Available in 6", 8", 10", 12", 14", 16" and 18" diameter collars

3

Construction

Made entirely of Steel with an option in Aluminum


4

Applications

For installation in drop ceilings for department stores, restaurants, public offices, hospitals, etc.

5

View RPE

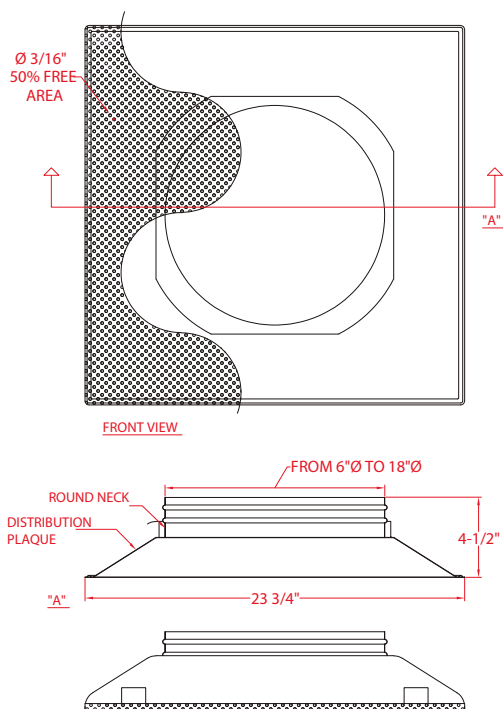


PACKAGING:
Airtight plastic packaging for fixing screws.



Lay In Diffuser RPE Steel / Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Mounting

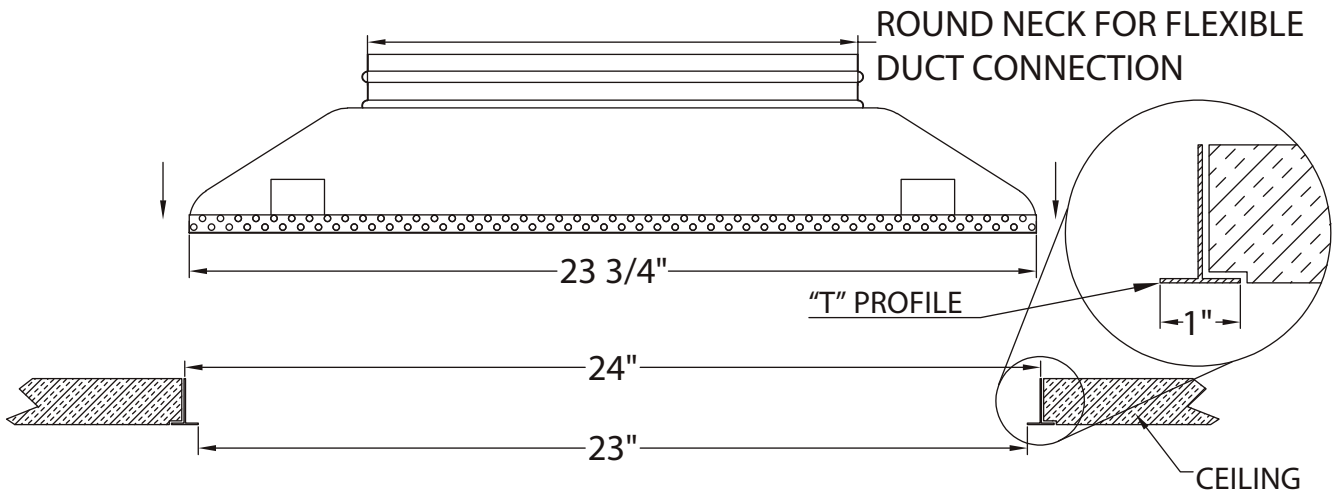

7 Nomenclature

RPE T B 12

PRODUCTO MATERIAL COLOR DE PINTURA DIAMETER

RPE PRODUCT	T MATERIAL	B PAINT COLOR	12 DIAMETER
RPE RETURN MODULAR WITH PERFORATED FACE	T UNINSULATED STEEL	B WHITE	06
	U UNINSULATED ALUMINUM	A NATURAL ALUMINUM	08
		N BLACK	10
			12
			14
			16
			18



Lay In Diffuser RPE Steel / Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

8

Accessories (OPTIONAL)



Damper CONCC

Galvanized steel circular connector with damper for air volume adjustment



Damper CONEC

Galvanized sheet circular connector used for connecting flexible duct to the main rectangular duct.



Damper COREC

Reinforced airtight circular damper with circumferential neoprene seal.



Butterfly Damper CVM

Opposed blade butterfly volume control