



Round Fittings COD9C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Circular galvanized sheet metal elbow for 90-degree changes in direction

1

Finishes

Galvanized (G60 Minimum Galvanization)

"STAINLESS STEEL OPTION CAL.26"

2

Dimensions

It is manufactured from 4 up to 60 inches in diameter

3

Construction

Manufactured in galvanized steel in gauges 20, 22, 24, and 26, recommended according to the duct diameter.

*Option with double layer insulation.

*Option with fiberglass insulation with interior neoprene (duct liner).


4

Applications

Recommended for any air conditioning or ventilation system at a residential, commercial, or industrial level.

5

View

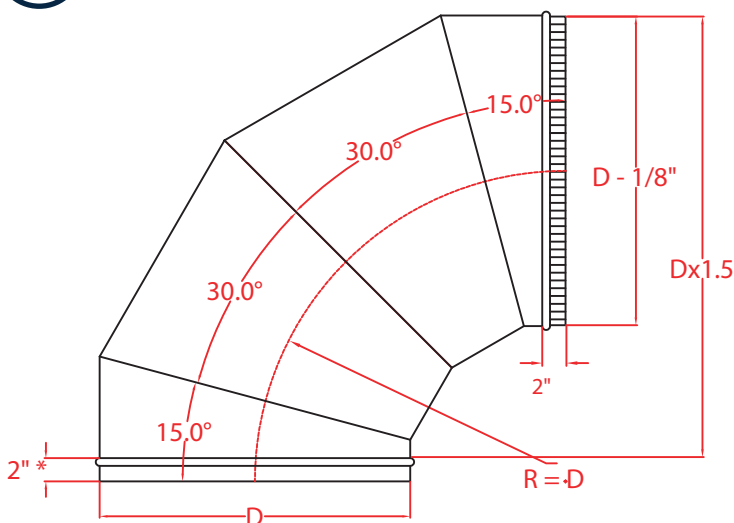

It is manufactured in 4 pieces up to 36" diameter.
Diameters 38" and up are manufactured in 5 pieces.
*With a reinforcement bead starting from 20" diameter.
Diameters 38" or more carry a double reinforcement bead.





Round Fittings COD9C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

COD9C S B SA S 20 24 15

PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE DIAMETER RADIUS

COD9C PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	20 GAUGE	24 DIAMETER	15 RADIUS
COD9C 90° CIRCULAR ELBOW	S SINGLE LAYER	B SHINY	SA WITHOUT INSULATION	S STANDARD FINISH	20	2 WHOLE INCHES	10
	D DOUBLE LAYER	O OPAQUE	N5 NEOPRENE INSULATION 1"		22		15
	M MIXED DOUBLE LAYER WITH 1 THINNER GAUGE ON THE INSIDE	I INOX 430 *ONLY GAUGE 26	N1 NEOPRENE INSULATION 1"		24		
	G MIXED DOUBLE LAYER WITH 2 THINNER GAUGES ON THE INSIDE		N2 NEOPRENE INSULATION 2"		26		
			N3 NEOPRENE INSULATION 1-1/2"				