



Round Fittings CNDDC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Circular ring connector with an integrated damper, designed to provide a secure duct connection while allowing controlled adjustment of airflow in air distribution systems.

1

Finishes

Galvanized (G60 Minimum Galvanization)

2

Dimensions

It is manufactured from 4 up to 20 inches in diameter

3

Construction

Manufactured in galvanized steel in gauges 26, 28, and 30, recommended according to the duct diameter.



4

Applications

Recommended for HVAC, extraction, or ventilation systems at residential, commercial, or industrial levels.

5

View

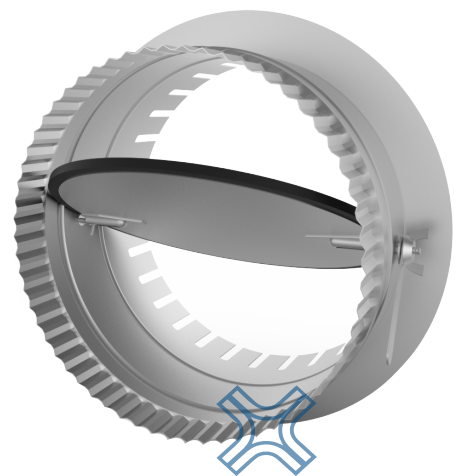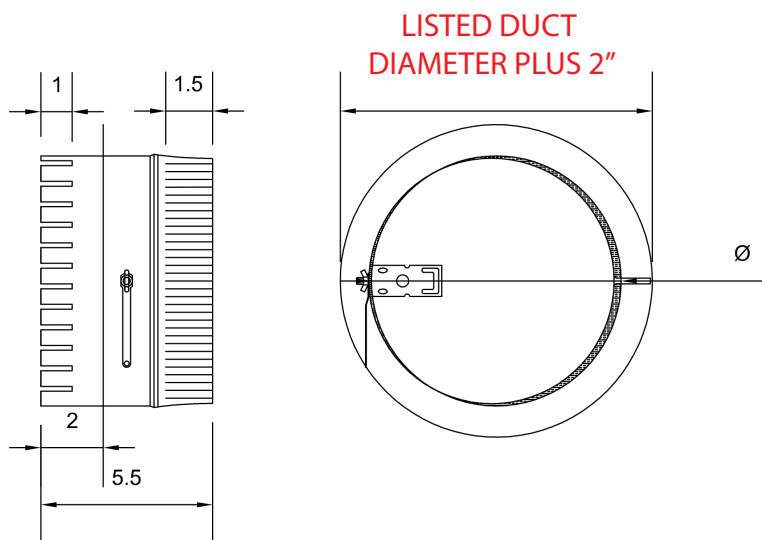



Round Fittings CNDDC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

CNDDC S B SA S 26 14
PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE DIAMETER

CNDDC PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	26 GAUGE	14 DIAMETER
CNDDC CONECTOR WITH RING AND DAMPER	S SINGLE LAYER	B SHINY O OPAQUE	SA WITHOUT INSULATION	S STANDARD FINISH	26 28 30	2 WHOLE INCHES