



Round Fittings COMPC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Galvanized sheet metal round damper with circumferential seal and graduated quadrant for air volume adjustment

1

Finishes

Galvanized (G60 Minimum Galvanization)

"STAINLESS STEEL OPTION CAL.26", INOX 430

2

Dimensions

It is manufactured from 4 up to 16 inches in diameter

3

Construction

Manufactured in galvanized steel in gauges 20,22,24 and 26, recommended according to the duct diameter.

4


Applications

For use in duct systems that require air volume adjustment.

*Note.-In its completely closed position it has a leakage of 0.15 cfm per inch of circumference.

5

View

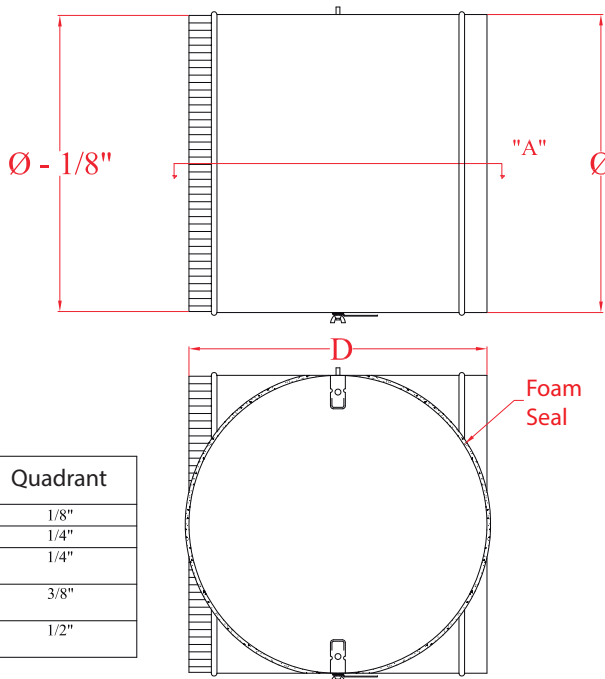

Ø	D	Quadrant
4" y 6"	4"Ø	1/8"
8"	5"Ø	1/4"
10" y 12"	Ø - 4"	1/4"
14" - 28"	Ø - 4"	3/8"
From 30" up	Ø - 4"	1/2"





Round Fittings COMPC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

COMPC S B SA S 24 20
PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE DIAMETER

COMPC PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	24 GAUGE	20 DIAMETER
COMPC ROUND DAMPER	S SINGLE LAYER	B SHINY	SA WITHOUT FIBERGLASS	S STANDARD FINISH	20	2 WHOLE INCHES
	D DOUBLE LAYER	O OPAQUE			22	
	M MIXED DOUBLE LAYER WITH 1 THINNER GAUGE ON THE INSIDE	I INOX 430 *ONLY GAUGE 26			24	
	G MIXED DOUBLE LAYER WITH 2 THINNER GAUGES ON THE INSIDE				26	