



Lay In Diffuser DPET Steel / DPEU Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Steel modular diffuser for 24 x 24-inch ceilings, with 3 stamped front deflectors that distribute air 360° uniformly and silently, aerodynamic box, and circular collar for flexible duct connection.

1

Finishes

Baked electrostatic powder paint (polyester) bright white standard. Other colors available: grey (electrostatic powder paint) and black (liquid bake coating).

2

Dimensions

Available in 6", 8", 10", 12", 14", and 16" diameter collars

3

Construction

Made entirely of Steel (DPET) with an option in Aluminum (DPEU)



4

Applications

For installation in drop ceilings for department stores, restaurants, public offices, hospitals, etc.

5

View DPE

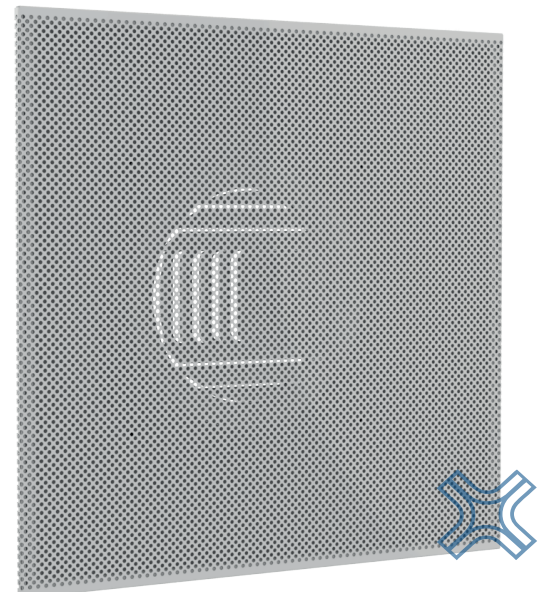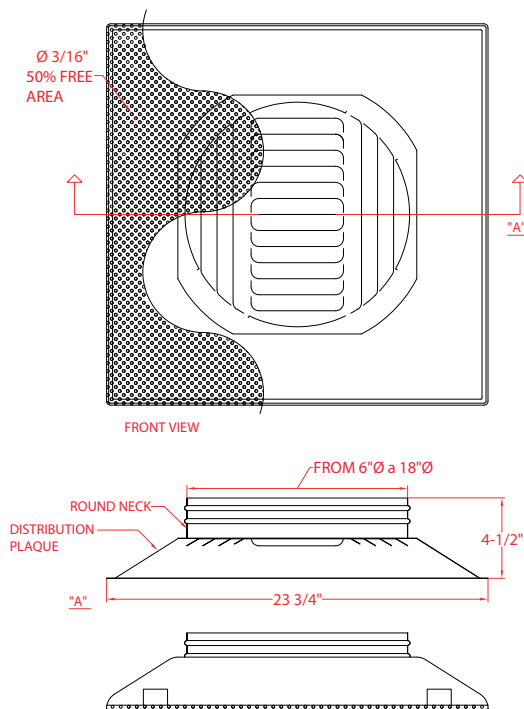

PACKAGING:


Airtight plastic packaging for fixing screws.



Lay In Diffuser DPET Steel / DPEU Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Mounting

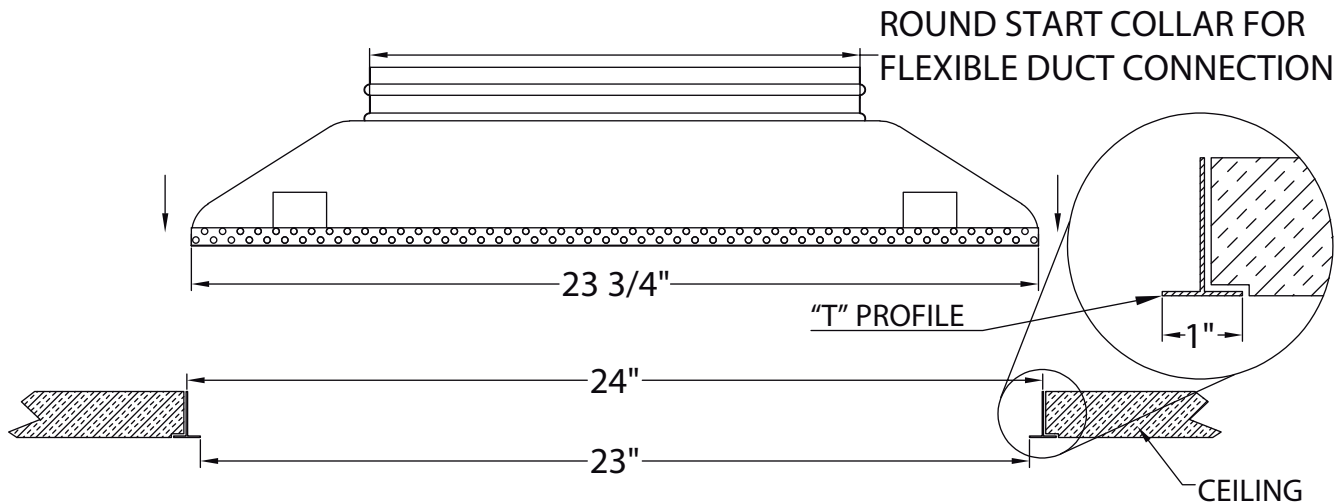

7 Nomenclature

DPE T B 12

PRODUCTO MATERIAL COLOR DE PINTURA DIAMETER

DPE PRODUCT	T MATERIAL	B PAINT COLOR	12 DIAMETER
DPE PERFORATED FACE CEILING DIFFUSER WITH 4-WAY DEFLECTOR	T UNINSULATED STEEL	B WHITE	06
	U UNINSULATED ALUMINUM	A NATURAL ALUMINUM	08
		N BLACK	10
			12
			14
			16



Lay In Diffuser DPET Steel / DPEU Aluminium

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

8 You might also be interested in



Damper CONCC

Galvanized steel circular connector with damper for air volume adjustment



Damper CONEC

Galvanized sheet circular connector used for connecting flexible duct to the main rectangular duct.



Damper COREC

Reinforced airtight circular damper with circumferential neoprene seal.



Butterfly Damper CVM

Opposed blade butterfly volume control