



Round Fittings IJR4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Galvanized sheet metal circular connection with a 45° tap from the main duct

1

Finishes

Galvanized (G60 Minimum Galvanization)
"STAINLESS STEEL OPTION CAL.24" and 26"
*Option with double-wall.

2

Dimensions

It is manufactured from 4 up to 60 inches in diameter

3

Construction

Manufactured in galvanized steel in gauge 30 recommended according to the duct diameter.


4

Applications

Recommended for HVAC, extraction, or ventilation systems at residential, commercial, or industrial levels

5


View

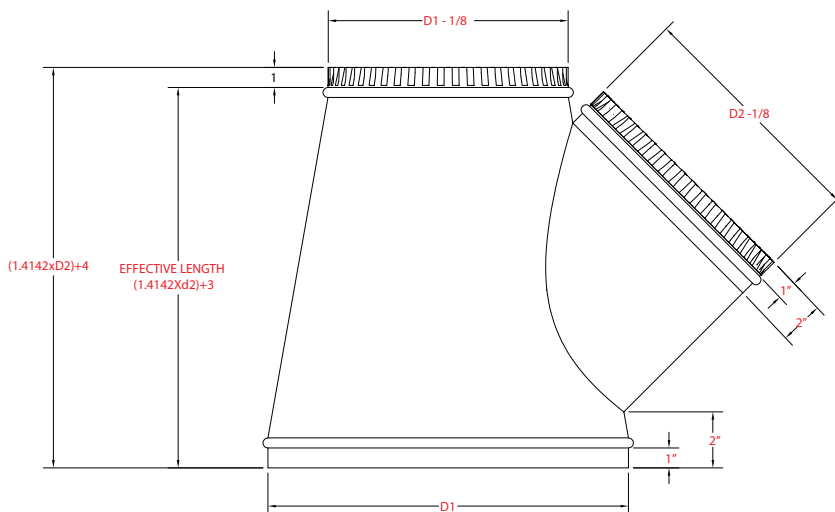

$D1$ =Main duct diameter

$D2$ = Branch diameter

Available in sizes from 4" to 60"

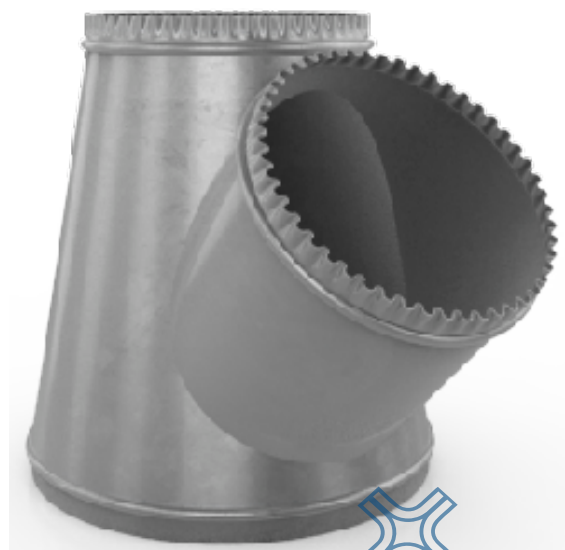



Round Fittings IJR4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

IJR4C S O SA S 26 08 00 16 08

PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE MINOR DIAMETER MAJOR DIAMETER MINOR DIAMETER

IJR4C PRODUCT	S LAYERS	O FINISH	SA INSULATION	S STANDARD FINISH	26 GAUGE	08 SIDE OUTLET DIAMETER 1	00	16 MAJOR DIAMETER	08 MINOR DIAMETER
IJR4C 45° REDUCING LATERAL	S SINGLE LAYER	B SHINY	SA WITHOUT FIBERGLASS	S STANDARD FINISH	20	2 WHOLE INCHES	00	2 WHOLE INCHES	2 WHOLE INCHES
	D DOUBLE LAYER	O OPAQUE	N5 FIBERGLASS DUCT LINER 1/2"		22				
	M MIXED DOUBLE LAYER WITH 1 THINNER GAUGE ON THE INSIDE	I INOX 430 *ONLY GAUGE 26	N1 FIBERGLASS DUCT LINER 1"		24				
	G MIXED DOUBLE LAYER WITH 2 THINNER GAUGES ON THE INSIDE		N2 FIBERGLASS DUCT LINER 2"		26				
			N3 FIBERGLASS DUCT LINER 1-1/2"		28				
					30				