



Round Fittings INC4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Galvanized sheet metal circular connection with a 45° tap from the main duct

1

Finishes

Galvanized (G60 Minimum Galvanization)

"STAINLESS STEEL OPTION CAL.26", INOX 430

*Option with double-wall

2

Dimensions

It is manufactured from 4 up to 60 inches in diameter

3

Construction

Manufactured in galvanized steel in gauges 20,22,24 and 26, recommended according to the duct diameter.


4

Applications

Recommended for HVAC, extraction, or ventilation systems at residential, commercial, or industrial levels

5

View

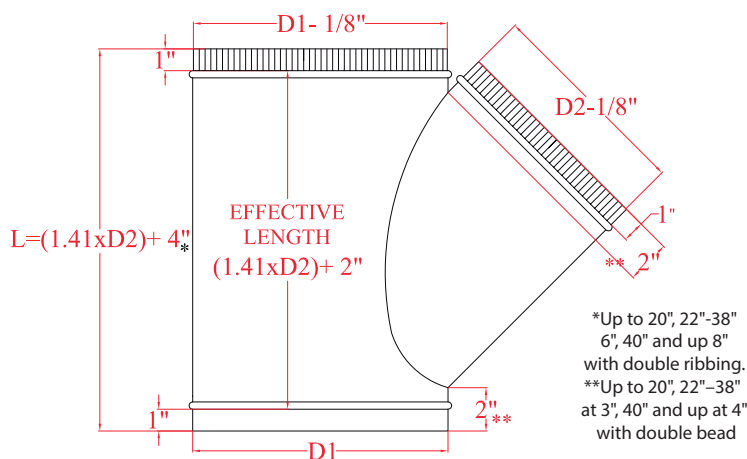

$D1$ = Main duct diameter,
 $D2$ = Branch diameter.
 Available in sizes from 4" to 60"





Round Fittings INC4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

INC4C S B SA S 20 22 00 24

PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE MINOR DIAMETER MAJOR DIAMETER

INC4C PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	20 GAUGE	22 MINOR DIAMETER	00	24 MAJOR DIAMETER
INC4C 45-DEGREE CIRCULAR INSERT WITH A CIRCULAR OUTLET	S SINGLE LAYER	B SHINY	SA WITHOUT FIBERGLASS	S STANDARD FINISH	20	2 WHOLE INCHES	00	2 WHOLE INCHES
	D DOUBLE LAYER	O OPAQUE	N5 FIBERGLASS DUCT LINER 1/2"		22			
	M MIXED DOUBLE LAYER WITH 1 THINNER GAUGE ON THE INSIDE	I INOX 430 *ONLY GAUGE 26	N1 FIBERGLASS DUCT LINER 1"		24			
	G MIXED DOUBLE LAYER WITH 2 THINNER GAUGES ON THE INSIDE		N2 FIBERGLASS DUCT LINER 2"		26			
			N3 FIBERGLASS DUCT LINER 1-1/2"					