Vermont Corp

vermontcorp.us / sales@vermontcorp.us

Spiral Duct SRCC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Spiral duct with three reinforcing ribs, beaded and crimped

1 Finishes

Manufactured in galvanized steel in gauges from 26 up to 30 recommended according to the duct diameter.

***Option with double layer insulation.**

***Option with fiberglass insulation with interior neoprene (duct liner).**

***1" Duct Board insulation option**

2 Dimensions

"Available in diameters from 26 to 30 inches and standard lengths of 2.44 m (8 ft), with custom lengths available upon request. Note: Allow for a 1-1/2" length loss due to the crimp.

3 Construction

G60 minimum galvanization

4 Applications

Due to its high efficiency thanks to its shape, round ductwork is ideal for any residential, commercial, or industrial HVAC and/or ventilation system.

5 View SRCC

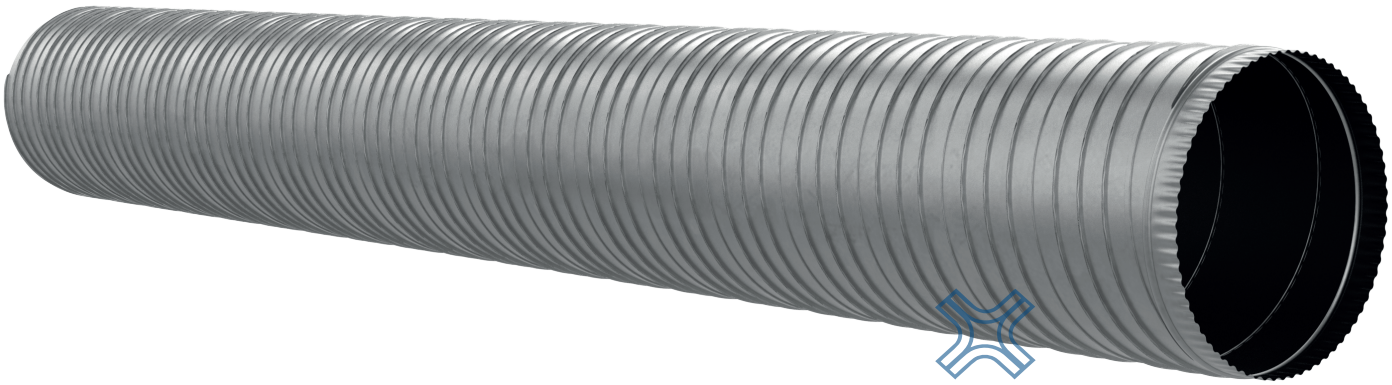

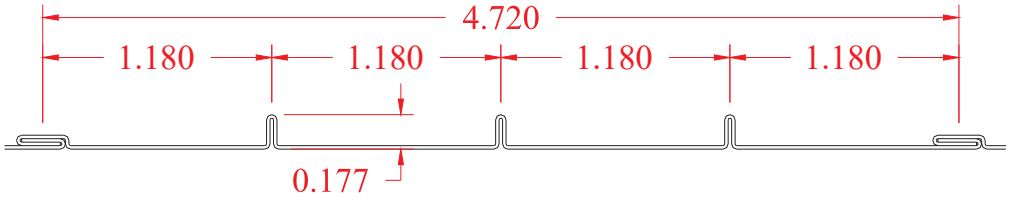

Air Distribution Products

VERMONT CORP reserves the right to make changes without prior notice

Spiral Duct SRCC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Mounting

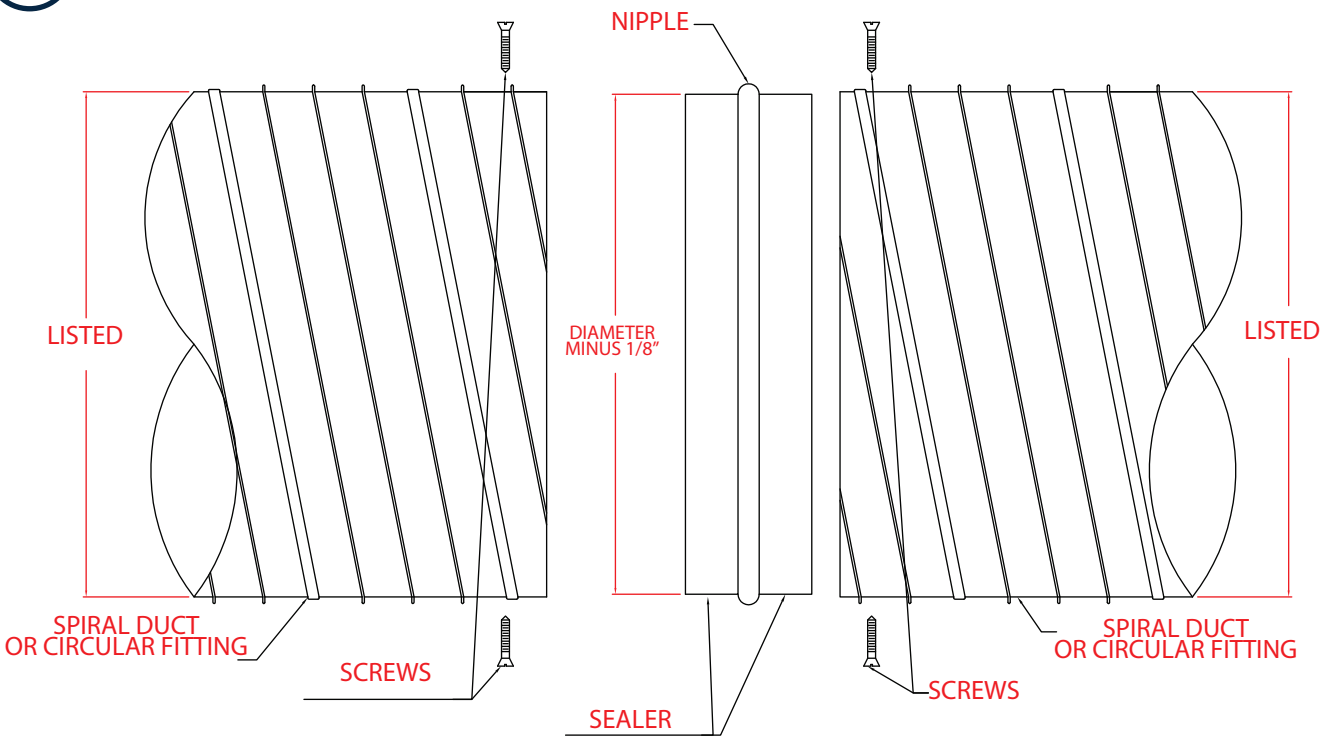

VERMONT CORP reserves the right to make changes without prior notice

Spiral Duct SRCC

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

7 Nomenclature

SRC	S	B	SA	S	26	22	00	06	C
PRODUCT	LAYERS	FINISH	INSULATION	STANDARD FINISH	GAUGE	DIAMETER		LENGTH IN FEET	BEADED AND CRIMPEAD

SRC PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	26 GAUGE	22 DIAMETER	00	06 LENGTH IN FEET	C BEADED AND CRIMPEAD
SRC SPIRO ROUND SPIRAL DUCT	**S** SINGLE LAYER **D** DOUBLE LAYER	**B** SHINY **O** OPAQUE **I** INOX 430 *ONLY GAUGE.26	**SA** WITHOUT INSULATION **N5** NEOPRENE INSULATION 1/2” **N1** NEOPRENE INSULATION 1” **N2** NEOPRENE INSULATION 2” **N3** NEOPRENE INSULATION 1-1/2”	**S** STANDARD FINISH	**26** **28** **30**	2 INTEGERS	**00**	**00** METROS **01** **02** **03** **04** **05** **06** **07** **08** **09** **10**	**C** BEADED AND CRIMPEAD

VERMONT CORP reserves the right to make changes without prior notice