



Round Fittings COD4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

Galvanized sheet metal round elbow for 45-degree direction changes.

1

Finishes

Galvanized (G60 Minimum Galvanization)

"STAINLESS STEEL OPTION CAL.26"

*Option with double-wall.

2

Dimensions

It is manufactured from 4 up to 60 inches in diameter

3

Construction

Manufactured in galvanized steel in gauges 20, 22, 24, and 26, recommended according to the duct diameter.


4

Applications

Recommended for any air conditioning or ventilation system at a residential, commercial, or industrial level.

5

View COD4C

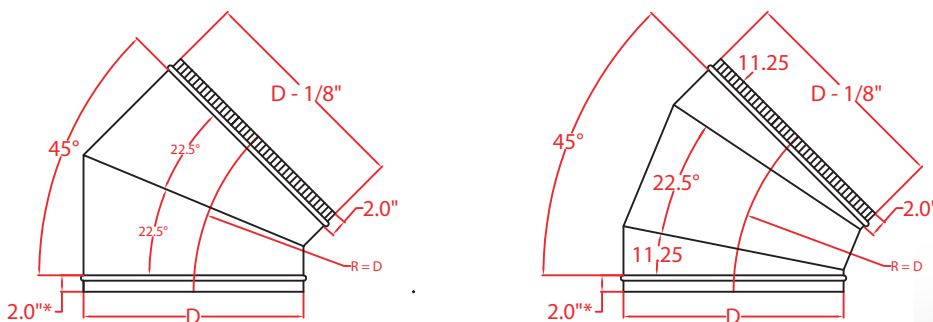

Manufactured in 2 sections up to 36" in diameter.
Ribbed from 20" diameter and above.
38" diameter or larger features double ribbin





Round Fittings COD4C

DUCTS+GRILLES+DIFFUSERS+FILTERS+FITTINGS+LOUVERS+DAMPERS

6 Nomenclature

COD4C S B SA S 20 24 15

PRODUCT LAYERS FINISH INSULATION STANDARD FINISH GAUGE DIAMETER RADIUS

COD4C PRODUCT	S LAYERS	B FINISH	SA INSULATION	S STANDARD FINISH	20 GAUGE	24 DIAMETER	15 RADIUS
COD4C 45° CIRCULAR ELBOW	S SINGLE LAYER	B SHINY	SA WITHOUT FIBERGLASS	S STANDARD FINISH	20	2 WHOLE INCHES	10
	D DOUBLE LAYER	O OPAQUE	N5 FIBERGLASS DUCT LINER 1/2"		22		15
	M MIXED DOUBLE LAYER WITH 1 THINNER GAUGE ON THE INSIDE	I INOX 430 *ONLY GAUGE 26	N1 FIBERGLASS DUCT LINER 1"		24		
	G MIXED DOUBLE LAYER WITH 2 THINNER GAUGES ON THE INSIDE		N2 FIBERGLASS DUCT LINER 2"		26		
			N3 FIBERGLASS DUCT LINER 1-1/2"				